



FLEXiRacks
Drying Systems for Every Industry

model **3CWL**
The 60 Series



60_{Inch} Width

30_{Inch} Length

76_{Inch} Height

30_{Load} Levels

3_{Inch} Spacing

5_{Inch} Caster

Center Post Adjustment

2.5_{Inch} Min **55**_{Inch} Max

Model Features




55 lb / **25** Kg



1102 lb / **500** Kg

Adjustable Arm Spacing

Customize shelf gaps for different part size.




Compact Storage Footprint

Racks nest tightly to maximize shop space




Sliding Center Post

Adjust rack width for large or narrow parts.

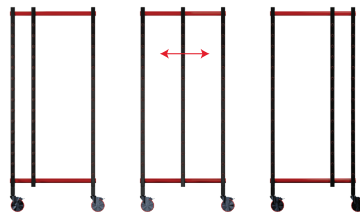


Extendable Legs

Extendable stabilizer legs allow double-sided loading



Rack-to-Cart Conversion

Transforms horizontal rack into a vertical-loading cart with sliding shelves.

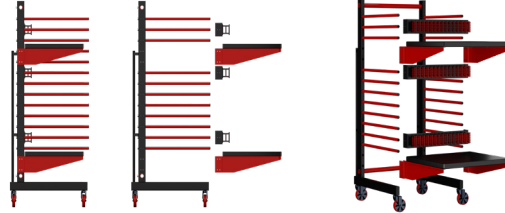

Durable Protective Coating



Model Benefits

Get in touch

949 592 2043
Contact@FlexiRacks.com
www.FlexiRacks.com



Model Loading from ONE side



Other Solutions

Model 3CWL

Model Accessories



15 Additional holding Bars package



Double your rack capacity with our Backside **Leg Extension Package**.



Central Post Package


Loading different part widths
minimum of 2.5 inches / 63.5 mm
maximum of 25 inches / 635mm



Shelf and Back Support Package

Convert rack into dolly-style cart for upright part placement.

Model Drawing

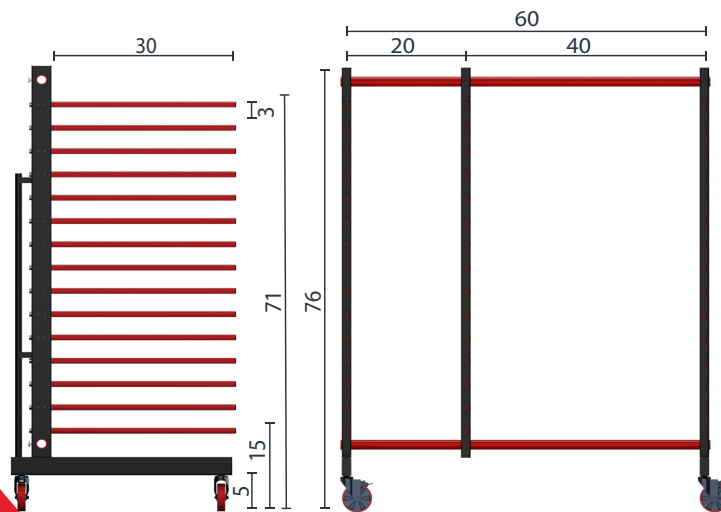

Model Specifications

Model Name
SUK

Dimensions

Depth of levels

Number of levels

Distance between holding bars

Clearance between levels

Diameter of carrying bars

Holding bars Covered

Installing Holding bars

4 wheels, 2 with brakes

Max. load: per level

Max. load: whole Rack / Trolley

Material & Color

3CWL

FR-3CWL-001

Length	Depth	Height
60 in	33 in	76 in
1,524 mm	838 mm	1,930 mm
30 in	/ 762 mm	
	30	
	min 2 in max 53 in	
	50 mm / 1,345 mm	
3.0 in	/ 76 mm	
ø 1.0 in	/ 26 mm	
	Rubber protective coating	
	Slot in system with locking screw	
ø 5.0 in	/ 127 mm	
25 Kg	/ 55 lb	
500 Kg	/ 1102 lb	
	Steel with Powder coating	
	RAL 9017 Black	