




FLEXiRacks
HOME OF INDUSTRIAL DRYING RACKS

model **2CW**
The 30 Series

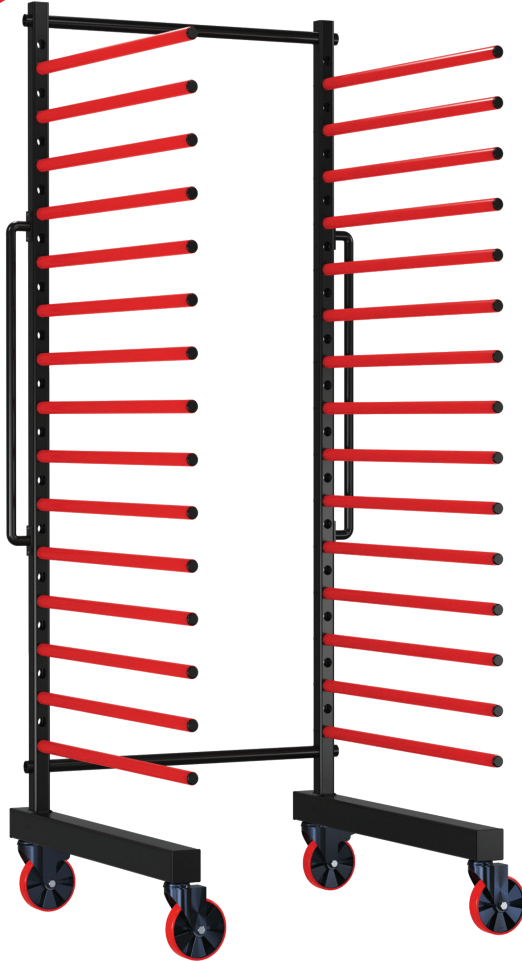

30_{Inch} Width

30_{Inch} Length

76_{Inch} Height

15_{Load} Levels

3_{Inch} Spacing

5_{Inch} Caster

Model Features




55 lb / **25** Kg




1102 lb / **500** Kg


Arm Spacing Adjust




Storage Space Saving

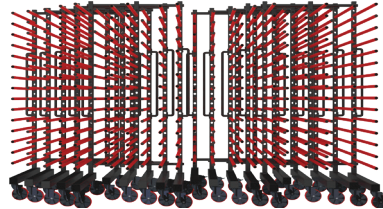


Protective Coated Arms



Movable Central Post



Extended Legs



Check Out the Next Generation
of Drying Racks

Model Benefits


Get in touch

949 592 2043
Contact@FlexiRacks.com
www.FlexiRacks.com



Get More


Model Loading from ONE side

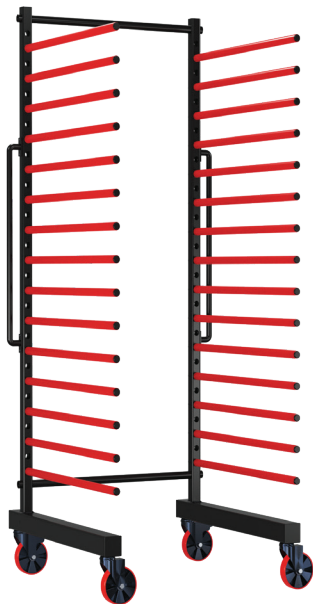

Other Solutions



Model 3CW



Model 2C2W

Model Accessories



15 Additional holding Bars package



Double your rack capacity with our Backside leg extension Package.





Loading different part widths
The Central Post Package
minimum of 2.5 inches / 63.5 mm
maximum of 25 inches / 635mm



Transform Rack to Dolly, using the Shelf and Back Support Package.

Model Drawing

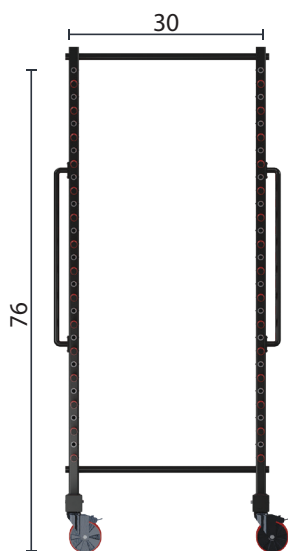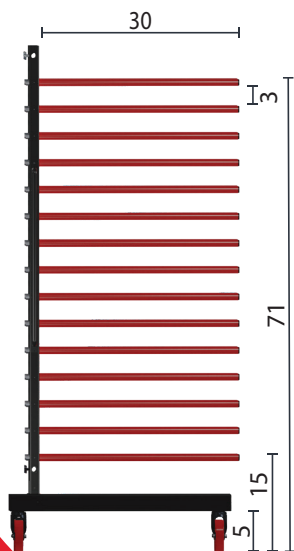

Model Specifications

Model Name
SUK

Dimensions

Depth of levels

Number of levels

Distance between holding bars

Clearance between levels

Diameter of carrying bars

Holding bars Covered

Installing Holding bars

4 wheels, 2 with brakes

Max. load: per level

Max. load: whole Rack / Trolley

Material & Color

2CW

2CW 11 22 31

Length	Depth	Height
30 in	33 in	76 in
762 mm	838 mm	1,930 mm

30 in / 762 mm

15

27.5 in / 698 mm

3.0 in / 76 mm

ø 1.0 in / 26 mm

Rubber protective coating

Slot in system with locking screw

ø 5.0 in / 127 mm

25 Kg / 55 lb

500 Kg / 1102 lb

Steel with Powder coating
RAL 9017 Black