




FLEXiRacks
HOME OF INDUSTRIAL DRYING RACKS

model **3CW**
The 30 Series

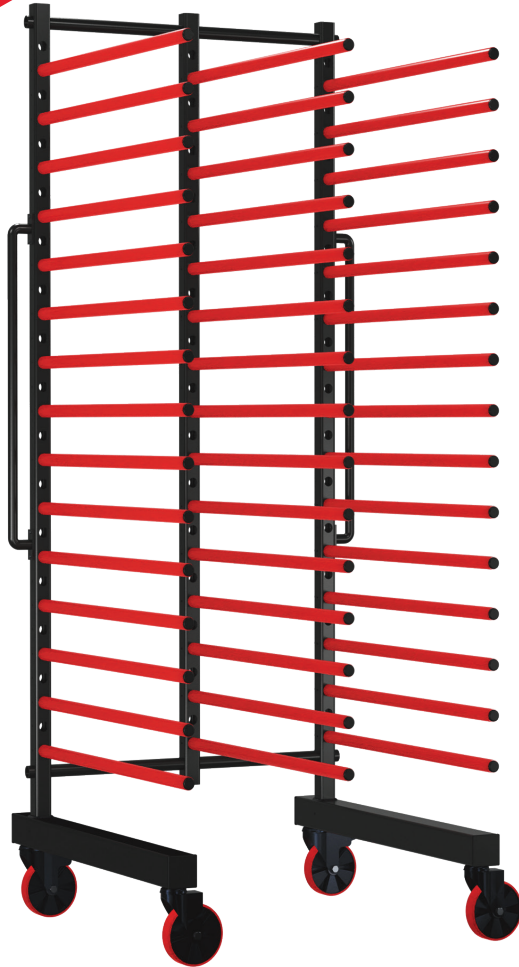

30_{Inch} Width

30_{Inch} Length

76_{Inch} Height

15_{Load} Levels

3_{Inch} Spacing

5_{Inch} Caster

Center Post Adjustment

2.5_{Inch} Min **25**_{Inch} Max




55 lb / **25** Kg




1102 lb / **500** Kg

Model Features


Arm Spacing Adjuster




Storage Space Saving

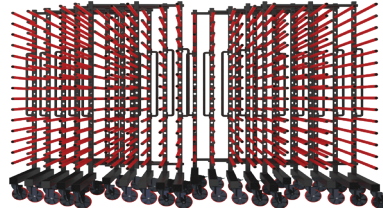


Protective Coated Arms



Movable Central Post



Extended Legs



Check Out the Next Generation
of Drying Racks

Model Benefits


Get in touch

949 592 2043
Contact@FlexiRacks.com
www.FlexiRacks.com



Get More

Model Loading from ONE side

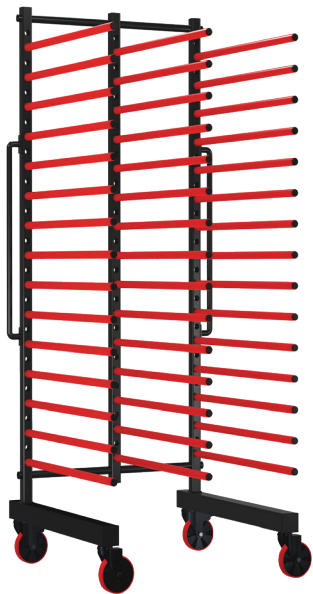

Other Solutions



Model 3C2W



Model 2C2W

Model Accessories



15 Additional holding Bars package



Double your rack capacity with our Backside leg extension Package.




Loading different part widths
The Central Post Package
minimum of 2.5 inches / 63.5 mm
maximum of 25 inches / 635mm



Transform Rack to Dolly, using the Shelf and Back Support Package.

Model Drawing

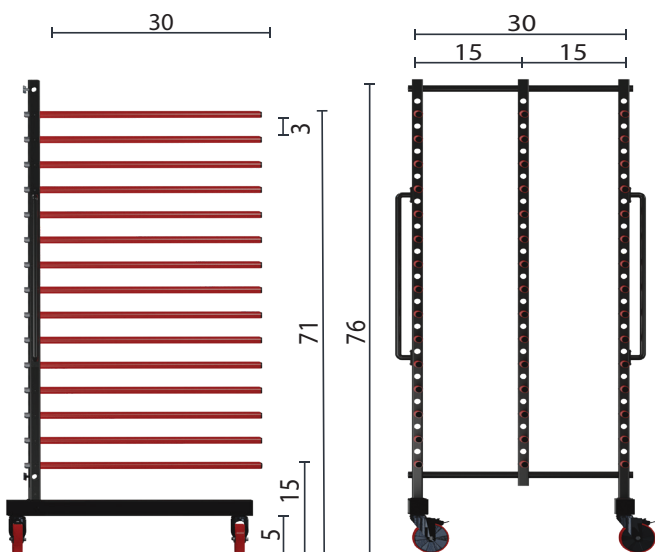

Model Specifications

Model Name
SUK

3CW
3CW 11 23 3151

Dimensions

Length	Depth	Height
30 in	33 in	76 in
762 mm	838 mm	1,930 mm

Depth of levels

30 in / 762 mm

Number of levels

15

Distance between holding bars

min 2 in max 26 in
50 mm / 660 mm

Clearance between levels

3.0 in / 76 mm

Diameter of carrying bars

ø 1.0 in / 26 mm

Holding bars Covered

Rubber protective coating

Installing Holding bars

Slot in system with locking screw

4 wheels, 2 with brakes

ø 5.0 in / 127 mm

Max. load: per level

25 Kg / 55 lb

Max. load: whole Rack / Trolley

500 Kg / 1102 lb

Material & Color

Steel with Powder coating
RAL 9017 Black