



FLEXiRacks
Drying Systems for Every Industry

model **2CW**
The 30 Series



Model Features

30 _{Inch} Width

30 _{Inch} Length

76 _{Inch} Height

15 _{Load} Levels

3 _{Inch} Spacing

5 _{Inch} Caster




55 lb / **25** Kg



1102 lb / **500** Kg


Adjustable Arm Spacing

Customize shelf gaps for different part size.




Compact Storage Footprint

Racks nest tightly to maximize shop space




Sliding Center Post

Adjust rack width for large or narrow parts.

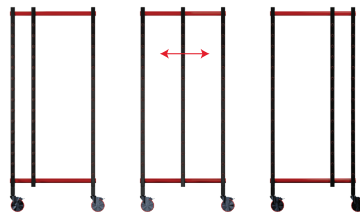


Extendable Legs

Extendable stabilizer legs allow double-sided loading




Rack-to-Cart Conversion

Transforms horizontal rack into a vertical-loading cart with sliding shelves.

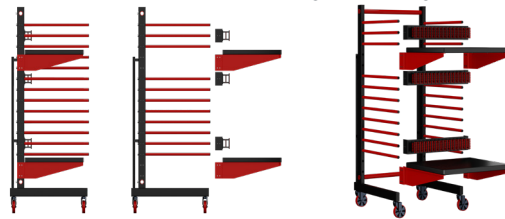

Durable Protective Coating



Model Benefits

Get in touch

949 592 2043
Contact@FlexiRacks.com
www.FlexiRacks.com



Get More

Model Loading from ONE side



Other Solutions



Model Accessories



15 Additional holding Bars package

Double your rack capacity with our Backside **Leg Extension Package**.



Central Post Package

Loading different part widths
minimum of 2.5 inches / 63.5 mm
maximum of 25 inches / 635mm

Shelf and Back Support Package

Convert rack into dolly-style cart for upright part placement.

Model Drawing

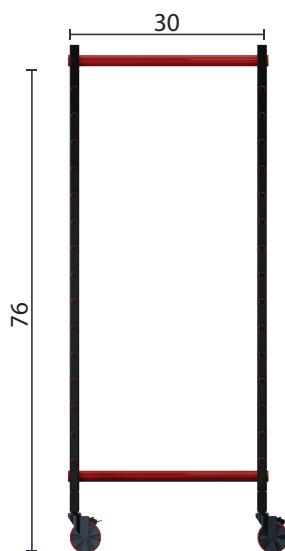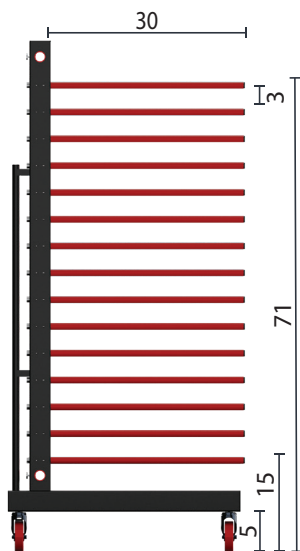

Model Name
SUK

Dimensions

Depth of levels

Number of levels

Distance between holding bars

Clearance between levels

Diameter of carrying bars

Holding bars Covered

Installing Holding bars

4 wheels, 2 with brakes

Max. load: per level

Max. load: whole Rack / Trolley

Material & Color

2CW

FR-2CW-001

Length	Depth	Height
30 in	33 in	76 in
762 mm	838 mm	1,930 mm

30 in / 762 mm

15

27.5 in / 698 mm

3.0 in / 76 mm

ø 1.0 in / 26 mm

Rubber protective coating

Slot in system with locking screw

ø 5.0 in / 127 mm

25 Kg / 55 lb

500 Kg / 1102 lb

Steel with Powder coating
RAL 9017 Black

Model Specifications